

## 720P AHD Forward Facing Camera

Model: **SVC-F**  
Analog High resolution, 1.3Mega Pixel,  
12VDC



### Features:

- All metal-cased mini housing with standard fixed lens.
- Really wide dynamic effect under multiple elements.
- Any light environment can show the true color reduction.
- enhanced image compression ratio, reduce the storage capacity of DVR.
- Easy installation on ceiling or wall, surface or flush mount.


### Cautions:

1. Please do not touch the Sensor with your fingers. If necessary, use a soft cloth moistened with alcohol to wipe away the dust. When the camera is not in use, keep the lens cap attached to protect the Sensor.
2. Please avoid placing or using the camera under direct sunlight, rain and high humidity environment.
3. Please ensure that the input voltage range is within the specifications.
4. Do not attempt to service the camera by yourself. Please refer all services to qualified dealers.


### Packing list:

Camera 1  
Instruction manual 1  
M4 screw 1  
Avaitor connector cable 1

### Dimensions:

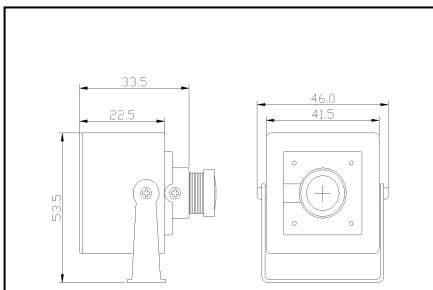

### Operation procedures:

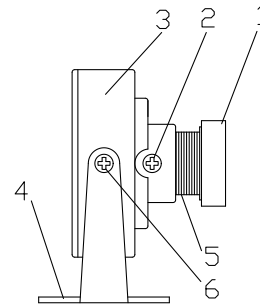

1. Remove the lens cap (1).
2. Attach the mounting bracket (4) to wall or ceiling, as required. Use the supplied screws to fix camera (3) in position ~ a firm mounting surface is essential for a stable installation.
3. Connect the camera as follows:  
Aviator connection to SVD MDVR
4. Adjust camera position by loosening the fixed screw (6). Adjust the focus sharpness of the lens (5) by loosening the focus-lock screw (2).
5. Re-tighten the all fixed screws.

### Specifications:

<b>Model</b>	SVC-F
Pick up Device	1/3 CMOS AR0130
TV System	PAL
Effective Pixel	1280Hx960V
Scanning System	progressive scan RGB CMOS
Synchronization	Internal
S/N Ratio	More than 50dB(AGC Off)
Noise Redution	3D
Auto Gain Control (AGC)	Auto
Electronic Shutter	Auto
Back Light Compensation	Auto
Infrared LED Range	No IR
Video Output	AHD 1 Vp-p, P 75Ω
Gamma Ratio	0.45
Lens	f 2.5mm Megapixel
Pan Adjusting	N/A
Tilt Adjusting	0-62 Degree
Power Supply	12V DC ±10%
Power Consumption	70mA
Dimensions (ø X H)	22.5 (L) x 53.5(H) x 46 (W) mm
Net Weight	150g
Weatherproof/Water Proof	IP65
Operating Temperature	-25°C to +55°C

\*Specifications are subject to change without prior notice.

- Input voltage exceeding the nominal rating by over +/-10% will cause abnormal operation.